


### PIN OUT

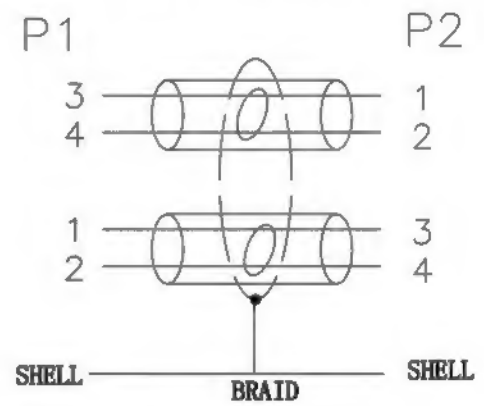

### REQUIREMENTS:

- 1:100% short and open testing.
- 2:Test conditions
  - DC300V /10MS
  - Insulation resistance 10MΩ(Min)
  - Conduction resistance 5Ω(Max)

③	MOLDED	BLACK 45P PVC	0.028	KG
②	CONNECTOR	1394 4PIN MALE	2	PCS
①	CABLE	UL20379 (30AWG*2C+D+AL)*2C+FILLER+MYLAR +AL+B(TC) OD:5.5MM,BLACK JACKET	5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
		MARCH 4.2012	1394 4P/M-4P/M-L=5H	MARCH 4.2012	FREE	
				26-0802		
				26-0802	Edition 1	Sheet 1/2